


ENGINEERED FOR VERSATILITY

EnsoLine[®] 2400 Grip

Closed cell NBR/PVC blended rubber tube / rod / profile

- // ASTM D 1056 2A4/2A5 / 2C4/2C5 / 2B4/2B5
- // Higher density closed cell expanded rubber
- // Oil and fuel resistant
- // Multiple colors available

www.armacell.us

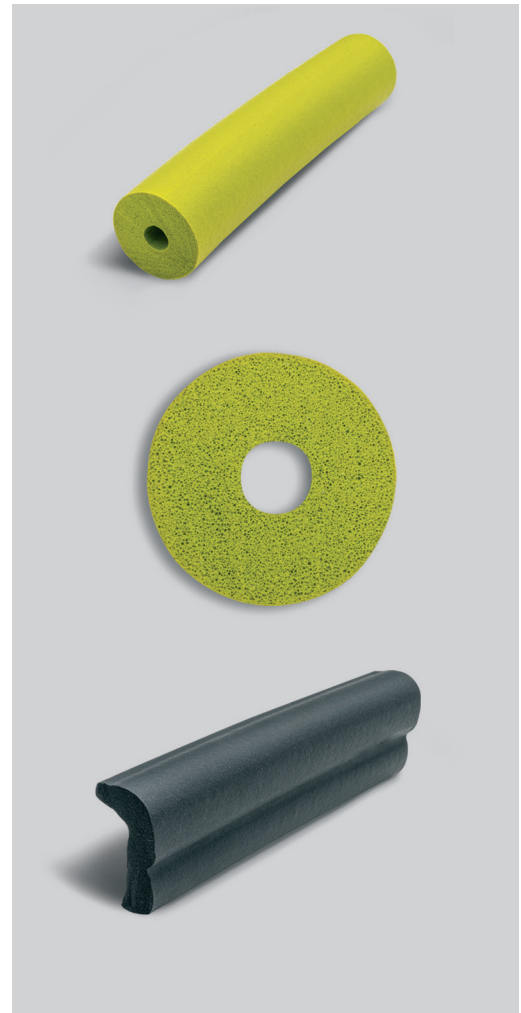

 **armacell**[®]
ArmaComp[™]

ENSOLINE® 2400 GRIP | Closed cell NBR/PVC blended rubber tube / rod / profile

EnsoLine 2400 Grip: Armacell (Conover, NC Plant) manufactures a closed cell, 18 - 24 lb/ft³ [288 - 384 kg/m³] density, NBR/PVC blended rubber tube / rod / profile product 2400 Grip, that meets the requirements of ASTM D 1056 2A4/2A5 / 2C4/2C5 / 2B4/2B5. 2400 Grip meets the horizontal burn / flame requirements of FMVSS 302 at 0.500" (1/2") (12.7 mm) & higher. 2400 Grip is available in various colors.

TECHNICAL DATA SHEET | TUBE / ROD / PROFILE (effective 12/28/2021)

POLYMER: NBR/PVC

Physical Property	Test Method	Unit	Value	
ASTM D 1056 Designation	-	-	2A4/2A5 2C4/2C5 2B4/2B5	
Cell Structure	-	-	Closed	
Color	-	-	Multiple	
Compression Deflection 25%	ASTM D 1056	psi kPa	13 - 17 89.6 - 117.2	
Compression Deflection 25%, after Heat Aging	ASTM D 1056	%	± 30	
Compression Set (Room temp)	ASTM D 1056	%	25 max	
Density	ASTM D 1056	lb/ft ³ kg/m ³	18 - 24 288.3 - 384.4	
Elongation	ASTM D 412 (Die A)	%	175 min	
Flammability	FMVSS 302	in mm	0.500 and higher 12.7 and higher	
Fluid Immersion	ASTM D 1056	%	50 max	
Hardness, Durometer Shore 00	ASTM D 2240	-	25 - 45	
Service Temperature	Low	ASTM D 1056	°F °C	-20 -28.8
		High Intermittent	-	°F °C
Tensile Strength	ASTM D 412 (Die A)	psi kPa	200 min 1379 min	
Water Absorption	ASTM D 1056	%	5 max	

All data and technical information are based on results achieved under the specific conditions defined according to the testing standards referenced. Despite taking every precaution to ensure that said data and technical information are up to date, Armacell does not make any representation or warranty, express or implied, as to the accuracy, content or completeness of said data and technical information. Armacell also does not assume any liability towards any person resulting from the use of said data or technical information. Armacell reserves the right to revoke, modify or amend this document at any moment. It is the customer's responsibility to verify if the product is suitable for the intended application. The responsibility for professional and correct installation and compliance with relevant building regulations lies with the customer. This document does not constitute nor is part of a legal offer to sell or to contract.

At Armacell, your trust means everything to us, so we want to let you know your rights and make it easier for you to understand what information we collect and why we collect it. If you would like to find out about our processing of your data, please visit our [Data Protection Policy](#).

© Armacell, 2022. All rights reserved. Trademarks followed by © or TM are trademarks of the Armacell Group.
EnsoLine 2400 | DataSheet | 112022 | NA | EN-A

ABOUT ARMACELL

As the inventors of flexible foam for equipment insulation and a leading provider of engineered foams, Armacell develops innovative and safe thermal, acoustic and mechanical solutions that create sustainable value for its customers. Armacell's products significantly contribute to global energy efficiency making a difference around the world every day. With 3,100 employees and 26 production plants in 18 countries, the company operates two main businesses, Advanced Insulation and Engineered Foams. Armacell focuses on insulation materials for technical equipment, high-performance foams for high-tech and lightweight applications and next generation aerogel blanket technology.

For more information, please visit:

www.armacell.us

info.cf.us@armacell.com

800-973-0490

