

ENERGY SAVING SOLUTIONS

AP ArmaFlex SA AP ArmaFlex FS SA

Self-adhering Sheet and Roll Insulation

The original fiber-free, flexible elastomeric sheet and roll for equipment, vessel, and duct insulation – available with a labor-saving self-adhering system – for reliable protection against condensation, mold and energy loss. AP ArmaFlex® FS SA is PVC free.

- // Self-adhering system makes application easy and reduces installation time
- // Closed-cell structure provides excellent condensation control
- // Built-in vapor retarder eliminates need for additional vapor retarder
- // 25/50 rated for use in air plenums:
 - Up to 1" thickness in AP ArmaFlex
 - 1-1/2" and 2" thickness in AP ArmaFlex FS
- // Thickness up to 2" with R-value up to R-8

www.armacell.us



 **armacell**[®]
ArmaFlex[®]

TECHNICAL DATA – AP ArmaFlex® SA AND AP ArmaFlex® FS SA SHEET AND ROLL INSULATION - SELF ADHERING

Description

Black flexible closed-cell elastomeric thermal insulation in sheet and roll form with a self-adhering backing.

Specification Compliance

ASTM C 534, Type II — Sheet Grade 1	ASTM G21/C1338	MIL-C-3133C (MIL STD 670B)
ASTM C 1534, Type I	CAN/ULC-S102 ①	Grade SBE 3 ②
ASTM D 1056, 2C1	City of New York Approval MEA 107-89M	NFPA 90A, 90B
ASTM E 84, UL723	MIL-P-15280J, FORM S ②	UL 181

Approvals, Certifications, Compliances

- 3rd party certified by FM Approvals through 1" thickness per NFPA 4924.
- GREENGUARD Gold Certified.
- Manufactured without CFCs, HFCs, HCFCs, PBDEs, or Formaldehyde.
- Made with EPA registered Microban® antimicrobial product protection.
- All Armacell facilities in North America are ISO 9001 certified.
- Conforms to ASHRAE 90.1 Energy Standards
- Conforms to building codes: International Mechanical Code, IMC, International Energy Conservation Code, IECC, International Residential Code, IRC, Title 24 California Building Energy Efficiency Standards.
- AP ArmaFlex SA FS meets the living building challenge requirements. Red list compliant.

Typical Properties

Specifications	Values			Test Method
	AP ArmaFlex SA Through 1" (NBR/PVC based)	AP ArmaFlex FS SA 1-1/2" and 2" (EPDM based)	AP ArmaFlex SA 1-1/2" and 2" (NBR/PVC based)	
Thermal Conductivity: Btu • in/h • ft ² • °F (W/mK)				
75°F Mean Temperature [24°C]	0.245 (0.0353)	0.28 (0.040)	0.25 (0.036)	ASTM C 177 or C 518
100°F Mean Temperature [38°C]	0.257 (0.037)	0.289 (0.041)	0.256 (0.037)	
Water Vapor Permeability: Perm-in. [Kg/(s • m • Pa)]	0.05 (0.725 x 10 ⁻¹³)	0.08 (1.16 x 10 ⁻¹³)	0.05 (0.725 x 10 ⁻¹³)	ASTM E 96, Procedure A
Flame Spread and Smoke Developed Index:	25/50 rated Rated for Return Air Plenum use.	25/50 rated Rated for Return Air Plenum use.	Not rated	ASTM E 84, UL 723 CAN/ULC-S102 ①
Water Absorption, % by Volume:	0.2 %	0.2 %	0.2 %	ASTM C 209 or ASTM C1763
Mold Growth:	Passed	Passed	Passed	UL181
Fungi Resistance:				ASTM G21/C1338
Maximum Service Temperature ③	180°F [82°C]	180°F [82°C]	180°F [82°C]	
Minimum Service Temperature ④	-30°F [-34°C]	-30°F [-34°C]	-30°F [-34°C]	

① AP ArmaFlex meets CAN/ULC-S102 through 1" thickness.

② AP ArmaFlex meets MIL-P-15280J, FORM S and MIL-C-3133C (MIL STD 670B) Grade SBE through 1" thickness.

③ AP ArmaFlex SA and AP ArmaFlex FS SA can withstand temperature of 250°F (121°C) when tested according to ASTM C 411. "Test Method for Surface Performance of High-Temperature Insulations". At this temperature, AP ArmaFlex SA and AP ArmaFlex FS SA insulation shows no evidence of flaming, glowing, smoldering, delamination, melting or insulation collapse. Although this insulation will withstand high temperatures, continuous use temperature should be limited to 180°F [82°C].

④ At temperatures below -20°F (-29°C), elastomeric insulation starts to become less flexible. However, this characteristic does not affect thermal efficiency and resistance to water vapor permeability of ArmaFlex insulation.

TECHNICAL DATA – AP ArmaFlex® SA AND AP ArmaFlex® FS SA SHEET AND ROLL INSULATION - SELF ADHERING



R-Value	R-0.5	R-1.0	R-1.5	R-2.1	R-3.1	R-4.2	R-6	R-8
Thickness:	1/8" (3 mm)	1/4" (6 mm)	3/8" (10 mm)	1/2" (13 mm)	3/4" (19 mm)	1" (25 mm)	1-1/2" (38 mm)	2" (50 mm)
Sound Absorption Coefficients Frequency	125Hz	250Hz	500Hz	1000Hz	2000Hz	4000Hz	NRC	SAA
Thickness Nom. 1" (25 mm)	0.01	0.13	0.39	0.69	0.29	0.26	0.40	0.38
Thickness Nom. 1-1/2" (38 mm)	0.07	0.26	0.92	0.31	0.49	0.53	0.50	0.49
Thickness Nom. 2" (50 mm)	0.14	0.62	0.44	0.43	0.51	0.45	0.50	0.51

Sizes

Sheet: Width x Length	36" x 48" (.915 m x 1.22 m)								
Thickness (nominal)	1/8", 1/4", 3/8", 1/2", 3/4", 1", 1-1/2" & 2" (3, 6, 10, 13, 19, 25, 38 & 50 mm)								
Roll: Width	48" wide (1.22 m)								
Thickness (nominal) x Length	<table border="0"> <tr> <td>1/4" x 140' (6 mm x 42.6 m)</td> <td>1" x 35' (25 mm x 10.7 m)</td> </tr> <tr> <td>3/8" x 100' (10 mm x 30.5 m)</td> <td>1-1/2" x 25' (38 mm x 7.6 m)</td> </tr> <tr> <td>1/2" x 70' (13 mm x 21.4 m)</td> <td>2" x 18' (50 mm x 5.4 m)</td> </tr> <tr> <td>3/4" x 50' (19 mm x 15.2 m)</td> <td></td> </tr> </table>	1/4" x 140' (6 mm x 42.6 m)	1" x 35' (25 mm x 10.7 m)	3/8" x 100' (10 mm x 30.5 m)	1-1/2" x 25' (38 mm x 7.6 m)	1/2" x 70' (13 mm x 21.4 m)	2" x 18' (50 mm x 5.4 m)	3/4" x 50' (19 mm x 15.2 m)	
1/4" x 140' (6 mm x 42.6 m)	1" x 35' (25 mm x 10.7 m)								
3/8" x 100' (10 mm x 30.5 m)	1-1/2" x 25' (38 mm x 7.6 m)								
1/2" x 70' (13 mm x 21.4 m)	2" x 18' (50 mm x 5.4 m)								
3/4" x 50' (19 mm x 15.2 m)									


Outdoor Use

Painting with WB Finish or other protective jacketing is required to prevent damage to the insulation in exterior applications and to comply with the insulation protection sections of the International Energy Conservation Code (IECC) and ASHRAE 90.1.

Sound Transmission Class (STC)

	Thickness	STC Class
AP Armaflex	Nom. 1/2" (13 mm)	25
AP Armaflex	Nom. 1" (25 mm)	25

Acoustics: Insertion Loss

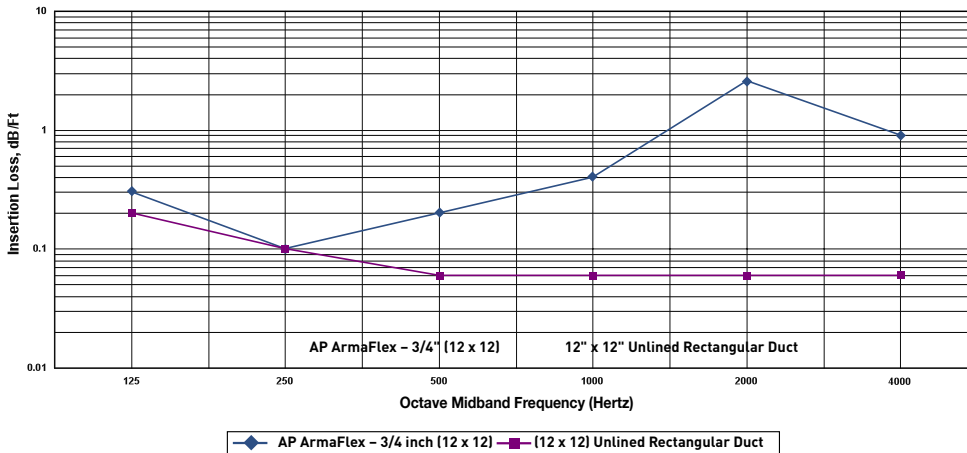

GREENGUARD Certified products are certified to GREENGUARD standards for low chemical emissions into indoor air during product usage. For more information, visit ul.com/gg.

Microban antimicrobial product protection is limited to the product itself and is not designed to protect the users of these products from disease causing microorganisms, or as a substitute for normal cleaning and hygiene practices. Microban International, Ltd. makes neither direct nor implied health claims for the products containing Microban® antimicrobial product protection. Data, photomicrographs and information presented are based on standard laboratory tests and are provided for comparative purposes to substantiate antimicrobial activity for non-public health uses. Microban is a registered trademark of Microban International, Ltd.

All data and technical information are based on results achieved under the specific conditions defined according to the testing standards referenced. Despite taking every precaution to ensure that said data and technical information are up to date, Armacell does not make any representation or warranty, express or implied, as to the accuracy, content or completeness of said data and technical information. Armacell also does not assume any liability towards any person resulting from the use of said data or technical information. Armacell reserves the right to revoke, modify or amend this document at any moment. It is the customer's responsibility to verify if the product is suitable for the intended application. The responsibility for professional and correct installation and compliance with relevant building regulations lies with the customer. This document does not constitute nor is part of a legal offer to sell or to contract.

At Armacell, your trust means everything to us, so we want to let you know your rights and make it easier for you to understand what information we collect and why we collect it. If you would like to find out about our processing of your data, please visit our [Data Protection Policy](#).

© Armacell, 2021. All rights reserved. Trademarks followed by ® or TM are trademarks of the Armacell Group.
AP ArmaFlex SA and AP ArmaFlex FS SA | Self-Adhering Sheet and Roll Insulation TDS | 032021 | NA | EN-A | 013

ABOUT ARMACELL

As the inventors of flexible foam for equipment insulation and a leading provider of engineered foams, Armacell develops innovative and safe thermal, acoustic and mechanical solutions that create sustainable value for its customers. Armacell's products significantly contribute to global energy efficiency making a difference around the world every day. With 3,135 employees and 24 production plants in 16 countries, the company operates two main businesses, Advanced Insulation and Engineered Foams. Armacell focuses on insulation materials for technical equipment, high-performance foams for high-tech and lightweight applications and next generation aerogel blanket technology.

For more information, please visit:
www.armacell.us
800-866-5638

